


Firmware Upgrade for the DI-1120 to v1.21

1. Download the flash programmer installation program for Windows.
<https://www.dataq.com/resources/repository/LMFlashProgrammer.msi>
2. Download the new firmware
<https://www.dataq.com/resources/repository/1120%20v1.21.bin>
3. The LM Flash Programmer will be in this directory
C:\Program Files (x86)\Texas Instruments\Stellaris\LM Flash Programmer\

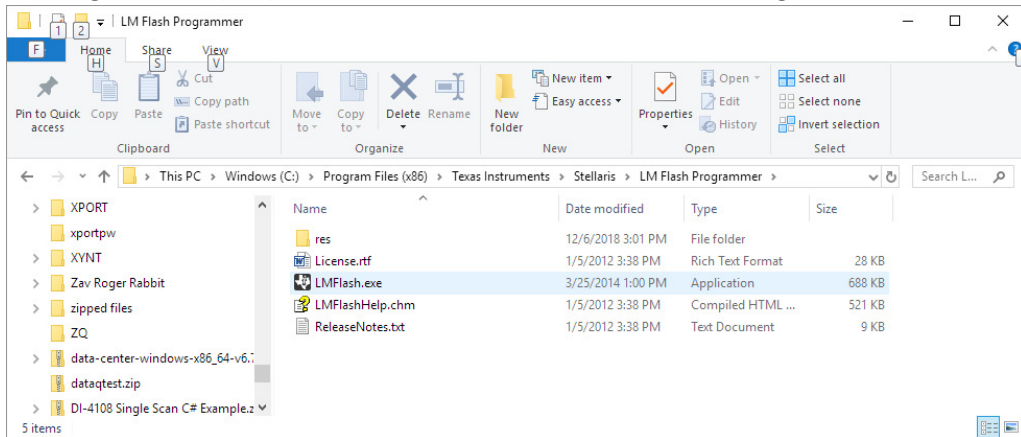

You can create a short cut on your desktop for convenience.

4. Unplug the cable from the DI-1120. Hold down the BUTTON then plug in the USB cable while holding the button down. The LED should be solid WHITE, if not repeat step 4.
5. Start the LMFlash.exe program. The startup Page will exactly as below. on the right, press the Program Tab. Navigate to your download directory, then click on the DI-1120v 1.21.bin file. Press the Program Button, lower left corner. When it finishes, it should return to FLASHING Yellow.

